200mm

285mm

Armrest installation

1、Find the top fastening screw in the spare parts bag, prepare inner hexagon spanner.



2. Uninstall small armrest, identify left、right armrest.



3. Put universal driving shaft of armrest in the fixed shaft.



4.Fasten armrest by inner hexagon spanner and top fastening screw.



5.Connect armrest air pipe as per corresponding letter A、K,and install air pipe cloth bag.



6. After-installation, effect picture is as below.

Sofa assemble

1. Take out back cushion and pillow.



2. Connect the plug of connecting wire of backrest heating cloth to plug of massage chair.



3.Put back cushion on the massage chair backrest and zip up.



4.Assemble pillow on the back cushion, connect correspondingly the pillow and back cushion by Velcro.



5.Put well the head cushion in its fixed position.



6. After-installation, effect picture is as below.



7.Connect correspondingly seat cushion air pipe as per H、I、J, then put the connected air pipe beneath chair seat board and put the cushion well.



Warn suggestion:

- Turn the pillow backward while massage.
- If feeling massage strength too strong, please assemble pillow.
- While no massage, use it as sofa by install back cushion and pillow.
- The man who is no sensitive to heat must be cautious to use heat function.

正面

200mm

Unpack package

1. Unpack the outer package of massage chair; take out outer package's upper cover and inner packing material.



2. After unpacking, effect as below.



3. Put massage chair backrest backward, after hearing a light voice "ka",the assemble is finished.



4. As per the instruction picture, carry the massage chair out of bottom cover of outer package.



5. Perk massage chair, push it to the position which is prepared in advance.



6. As per the picture instruction, the distance between massage chair and wall is more than 60cm.



Warn suggestion:

- Do not push too hard while pushing the backrest backward.

Shoulder installation

1.Take out shoulder package, identify the left、right shoulder.



2.Connect shoulder audio line with back cushion audio line.



3.Connect audio line terminal and put connecting terminal into the leather bag of inner shoulder part.

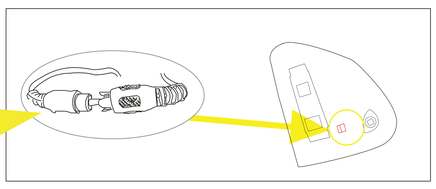

4.Assemble shoulder on the backrest fixed board and push downward to fasten shoulder.

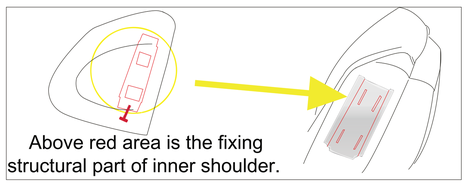

5. Screw nut under the shoulder to fasten shoulder.



6. After-installation effect picture is as below.



正面

Step by Step Installation Guide